

## General points

Micmac swing double gate to be fixed on a bottom base or in the ground

### Assets

- Modern design
- Easy to fix
- Suitable for motorization
- Large width
- Large range (height, width between posts)
- Also comes in sliding, swing, cantilever double gate, fence



Glossy RAL from 5000 to 9010

## Characteristics

- Until 2 m high
- Width between posts until 9 m
- 2 batteries to seal
- Opening 180°
- Powder coating
- Manual ou motorized
- Manufacturing process check, sustainability test

EN-13241-1 EEC standards

Galvanized steel Z275 EN-1305 standards


## Options

- Lock and strike plate Locinox
- Bottom 160x160x8 mm
- Defense horizontal upper frame bar, angle heightener
- Central ground catcher, drop bolt
- Reinforced for future motorization
- Motorization
- Other dimension on demand
- Hot dip galvanization finish
- Special lock (fireman standards, common key for several pieces)
- Comes in single large gate, dimension on demand



# BAR SWING DOUBLE GATE MICMAC

2/2

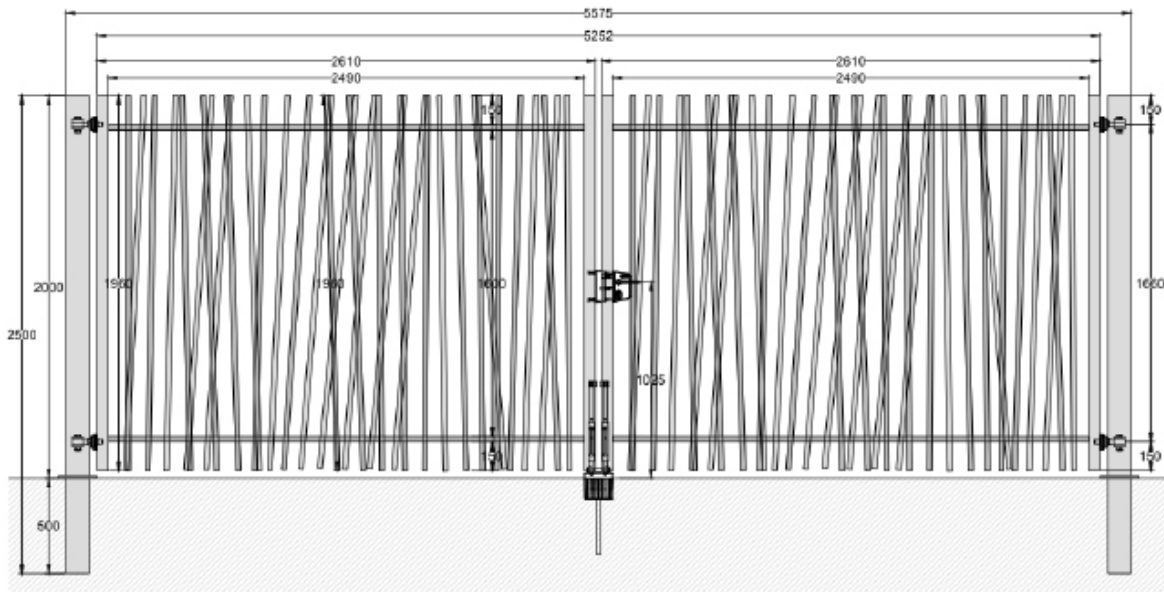


## Technics

Atlante swing double gate			
HEIGHT (mm) 1000 - 1250 - 1500 1750 - 2000	WIDTH BETWEEN POSTS 1000 mm		
	3000	4000 to 7000	8000 to 9000
Horizontal frame bars	50x30x2	50x30x2	50x30x2
Vertical frame bars	40x40x2	60x60x2	80x80x2
Bars	Ø25x1.5	Ø25x1.5	Ø25x1.5
Posts*	100x100x3	120x120x3	150x150x3
Lock and strike plate	Locinox	Locinox	Locinox
Hinges	Ø16	Ø20	Ø20
Centr. ground catcher	VSF	VSF	VSF
Drop bolt	EGS / OGS	EGS / OGS	EGS / OGS


Structure for motorized double gate	
HEIGHT (mm) 1000 - 1250 - 1500 1750 - 2000	WIDTH BETWEEN POSTS (mm)
	3000 to 9000
H frame bars	80x60x2
V frame bars	80x80x2
Bars	Ø25x1.5
Posts**	120x120x3
Hinges	On bearings

\*Width bet. posts 4000 : posts 100x100 - between 7000 and 9000 : posts 150x150 - between 9000 : posts 200x200


## Same range products

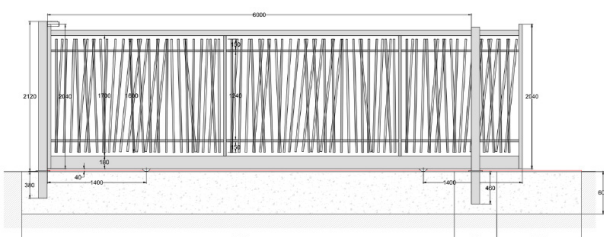

Micmac sliding double gate

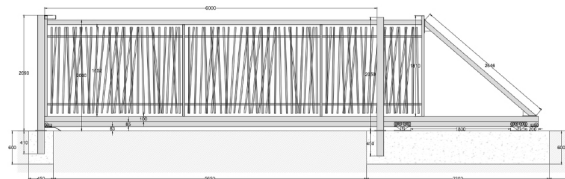

Micmac cantilever double gate

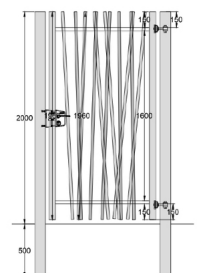

Micmac swing gate



Groupe Quaglia - fabricant français de clôtures et portails